



**SPECIFICATION SHEET FOR FIBRILLATING ROLLER**

**CUSTOMER :-** \_\_\_\_\_


**MACHINE MAKE & MODEL :-** \_\_\_\_\_

**SPEED(RPM):-** \_\_\_\_\_

**TAPE HARDNESS:-** \_\_\_\_\_

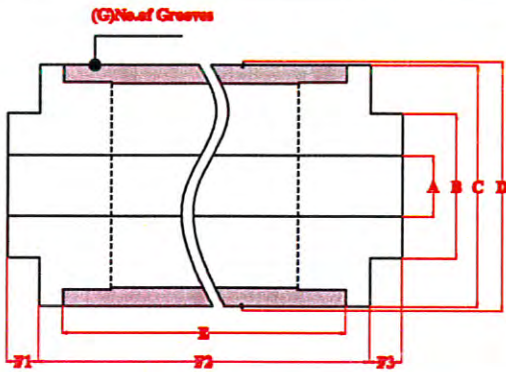

<b>STANDARDS</b>	<b>REQUIRMENT</b>
<b><u>Alloy Aluminium Fibrillating Roller</u></b>	
<b>(A) 35 / 38 / 40 / 60</b>	<b>(A)</b>
<b>(B) 90</b>	<b>(B)</b>
<b>(C) 150</b>	<b>(C)</b>
<b>(D) 155</b>	<b>(D)</b>
<b>(E) Max working width : 950 / 1050 / 1150 / 1200 / 1300 / 1400 / 1420 / 1600</b>	<b>(E)</b>
<b>(F1) 20 / 25</b>	<b>(F1)</b>
<b>(F2) 680 / 760</b>	<b>(F2)</b>
<b>(F3) 20 / 25</b>	<b>(F3)</b>
<b>(G) No. of Grooves: 24 / 32 / 42 / 50</b>	<b>(G)</b>
<b><u>Brass Fibrillating Bars</u></b>	
<b>(H) Angle of Pin : 15°</b>	<b>(H)</b>
<b>(I) Height of Pin : 2.0 / 2.5</b>	<b>(I)</b>
<b>(J) Pins per C.M. : 7 / 11 / 14 / 18</b>	<b>(J)</b>
<b>(K) Dia of Pin (Single row) : 0.7 / 0.9 / 1.0</b>	<b>(K)</b>
<b>    Dia of Pin (Double row) : 0.7</b>	
<b>(L) Pin Setover</b>	<b>(L)</b>
<b>Other Specification:-</b>	

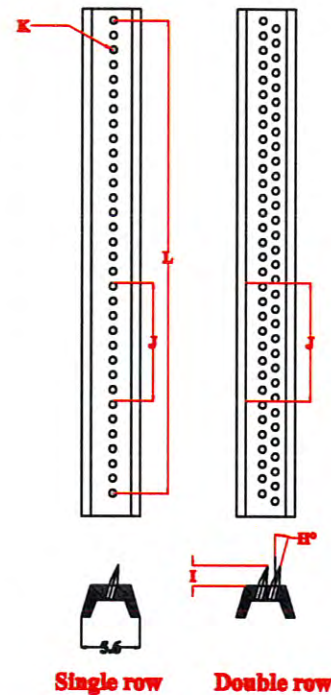

**PREPARED BY :-** \_\_\_\_\_

NAME

SIGN

DATE